

# DALI LED Dimming Driver

0-72W...144W 6A 12-24Vdc

- Dimming interface: DALI.
- PWM digital dimming, standard DALI logarithmic dimming curve.
- Dimming range: 0~100%, LED start at 0.1% possible.
- Max. current output: 6A.
- Full protective plastic housing.
- DALI bus standard: IEC62386.
- Suitable for indoor environments.




## Main Characteristics


Dimming Interface:	DALI (IEC62386)	Dimming Range:	0~100%, LED start at 0.1% possible
Input Voltage:	12-24Vdc	Working Temperature:	-30°C~55°C
Output Voltage:	12-24Vdc	Product Size:	L135xW30xH20(mm)
Output	6A×1CH	Package Size:	L140xW34xH23(mm)
Max. Output Power:	0-72W...144W	Weight(G.W.):	65g


## Dimensions

Unit: mm

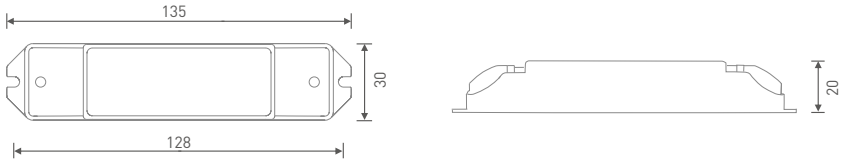

## System Connection Diagram

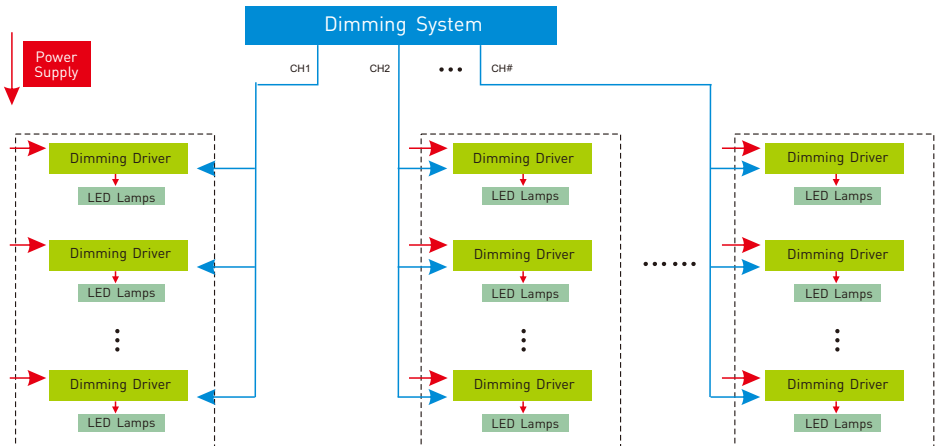



DALI bus no need distinguish plus-minus polarity.

Two groups of DALI signal socket



LED lamps connection socket

12-24Vdc power input socket

12V lamp connected, loads 0~72W(12V). 24V lamp connected, loads 0~144W(24V).

